

Pool lining

Quality and consistency for more than 50 years

Quality and consistency



Good reasons for choosing delifol:

- superior quality made in Germany for more than 50 years
- extremely tear resistant and durable through high quality fabric lining
- high UV resistance
- anti-microbial and hygienically flawless
- extensive colour and decor range
- optimal roll length from 16,20m to 25m
- short rolls from 5m
- manufactured and tested according to DIN EN 15836-2
- all approvals for EU safety standards for linings in the swimming pool construction





We grant you 10 years warranty on the sealing function of our delifol swimming pool and pond liners.



We fulfill your individual dream!

DLW delifol is suitable for new constructions as well as renovation of private pools, public indoor and outdoor swimming pools, hotel wellness areas, water parks and others.

There are 14 uni - colours available. Whether you choose timelessly beautiful granite grey or tropical caribic-green - we make your individual dream come true!



The source of deep relaxation



NG Granite



Pure quality of life




NG Sand



The source of pure pleasure



NG White

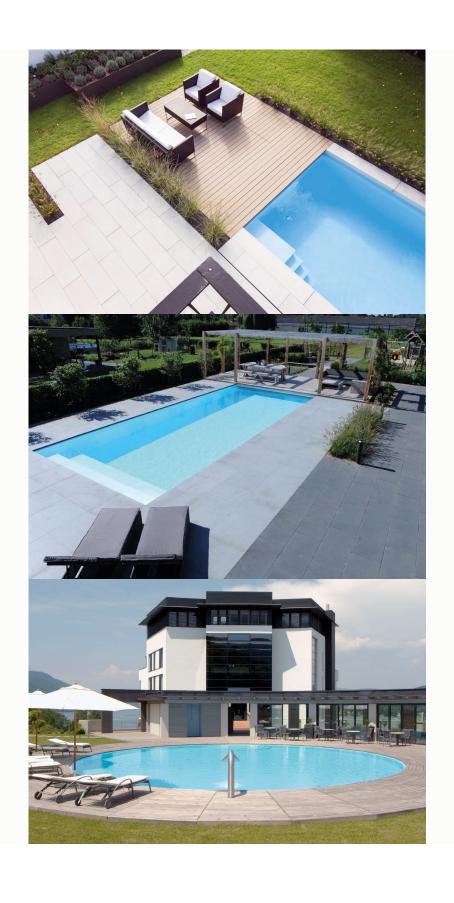


9

The beauty of public swimming



NG Azur

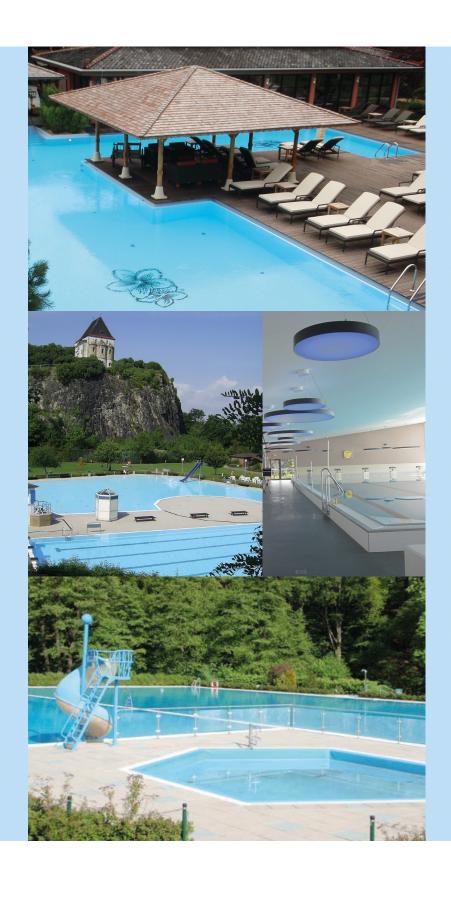

Show your individual style!

Select your dream swimming pool from 10 beautiful borders:



NGB Pyramid Aqua 27,5 cm



NGB Pyramid Granite 27,5 cm



NGB Pyramid Terra 27,5 cm



NGB Fish Aqua 21,5 cm




NGB Fish Blue 21,5 cm




NGB Fish Granite 21,5 cm



NGB Meander Aqua 27,5 cm



NGB Meander Blue 27,5 cm



NGB Zen Granite 27,5 cm



NGB Zen Terra 27,5 cm





12

We fulfill your individual dream!


Choose the pool of your dreams from 14 beautiful patterns:


NGD/C Playa Arena

NGD/C Playa Volcano





Enjoy great moments

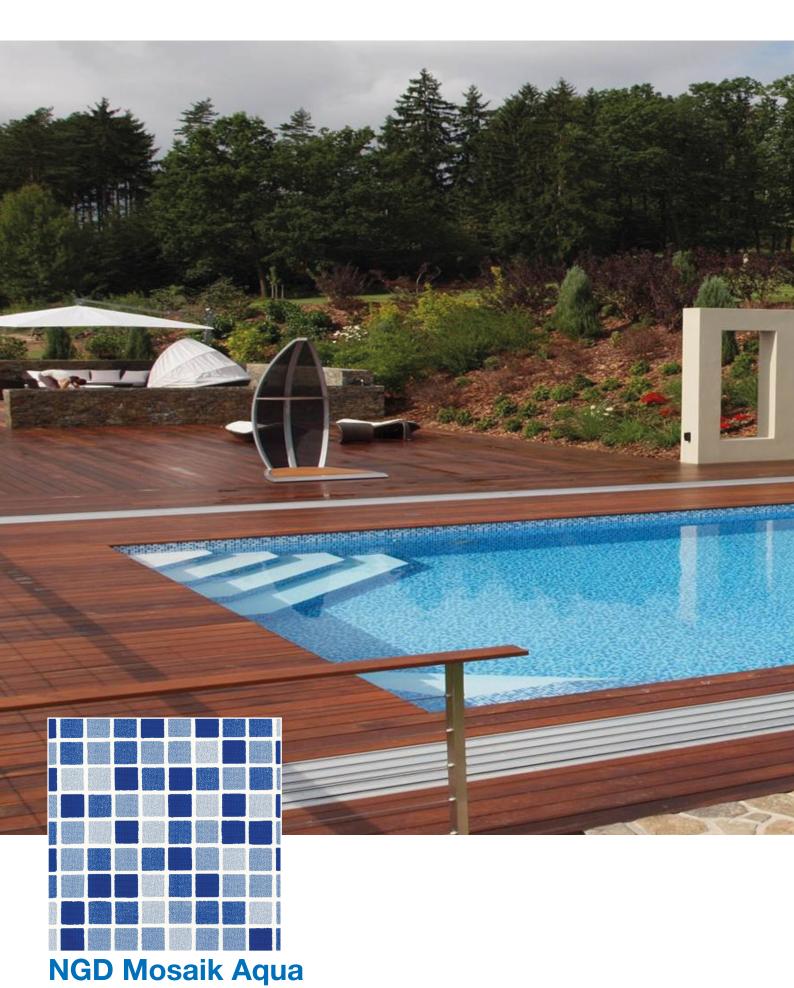

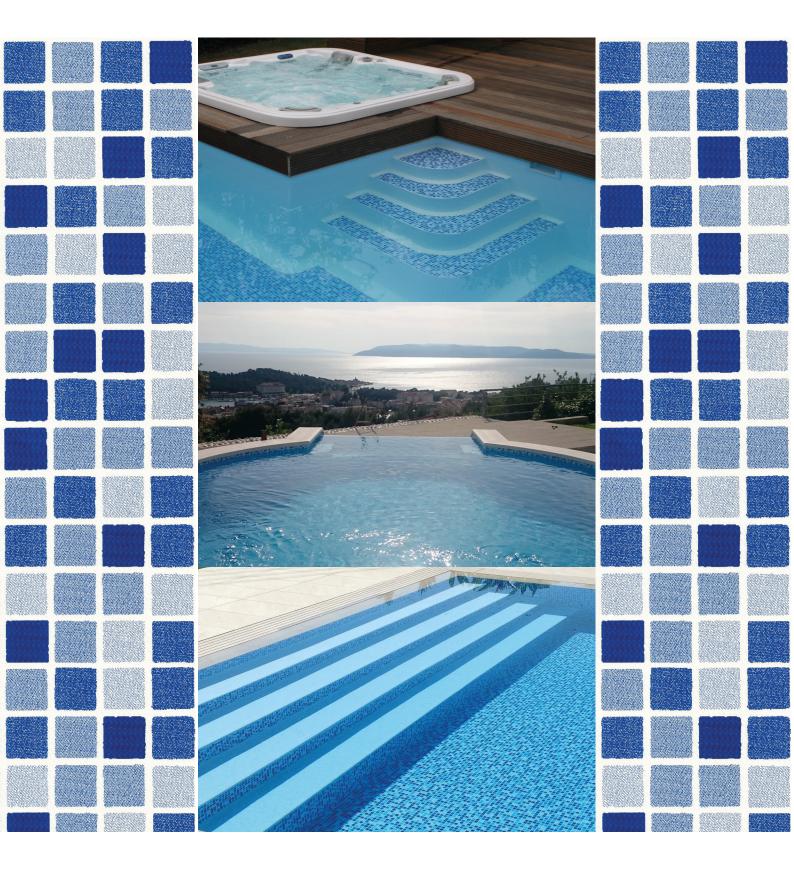


Enjoy water and sun

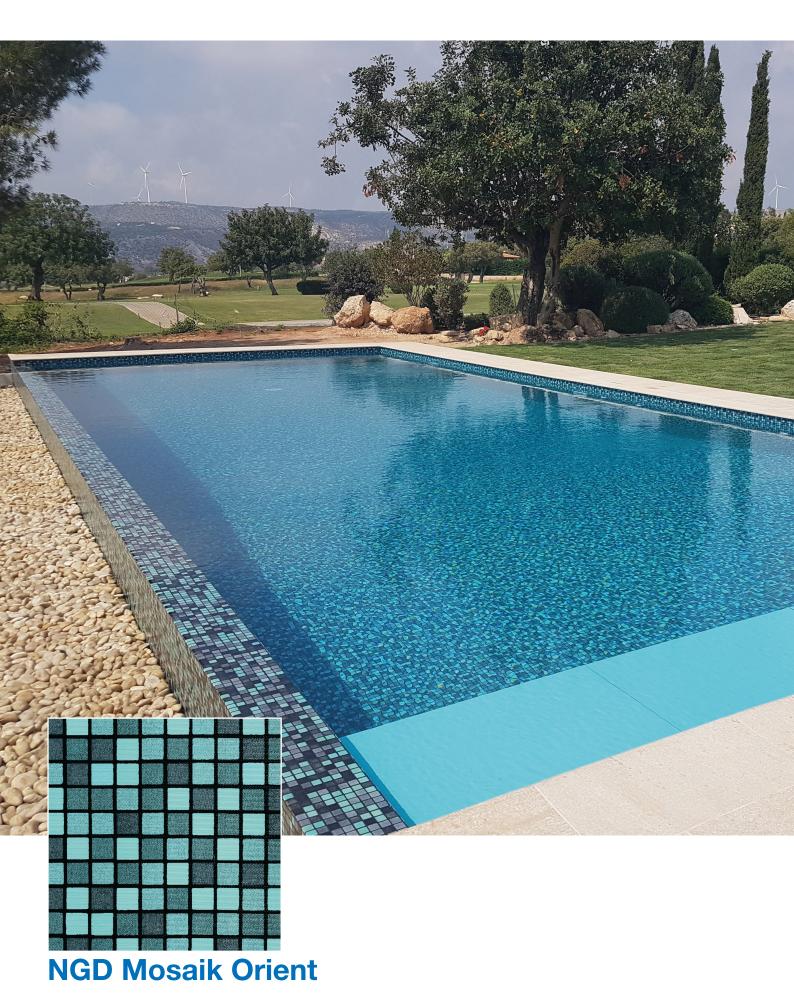


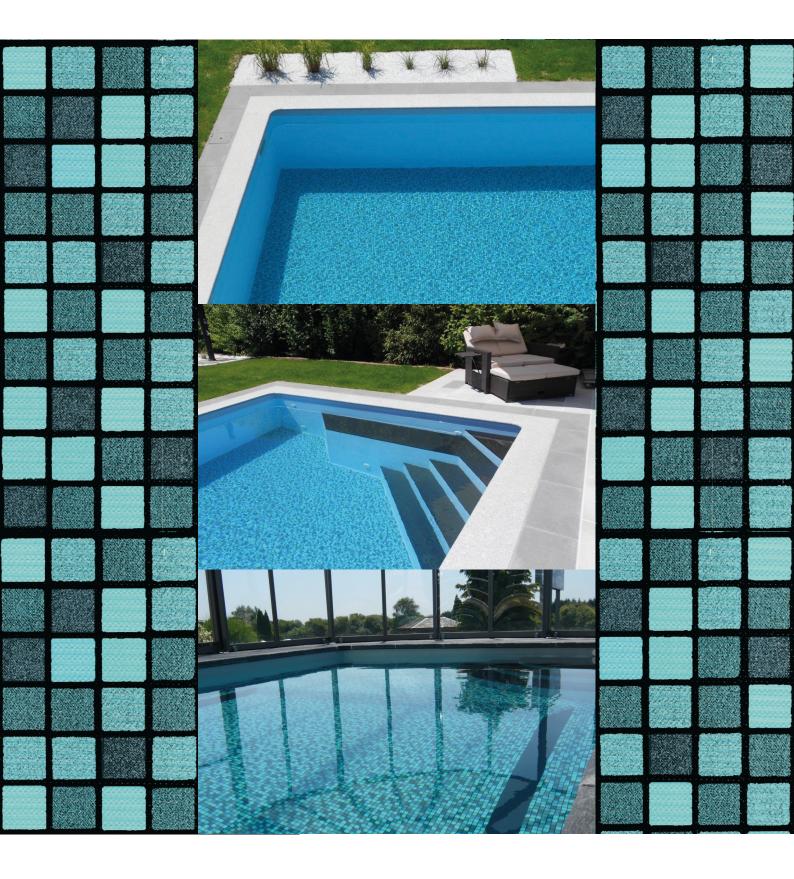


Bathing fun guaranteed

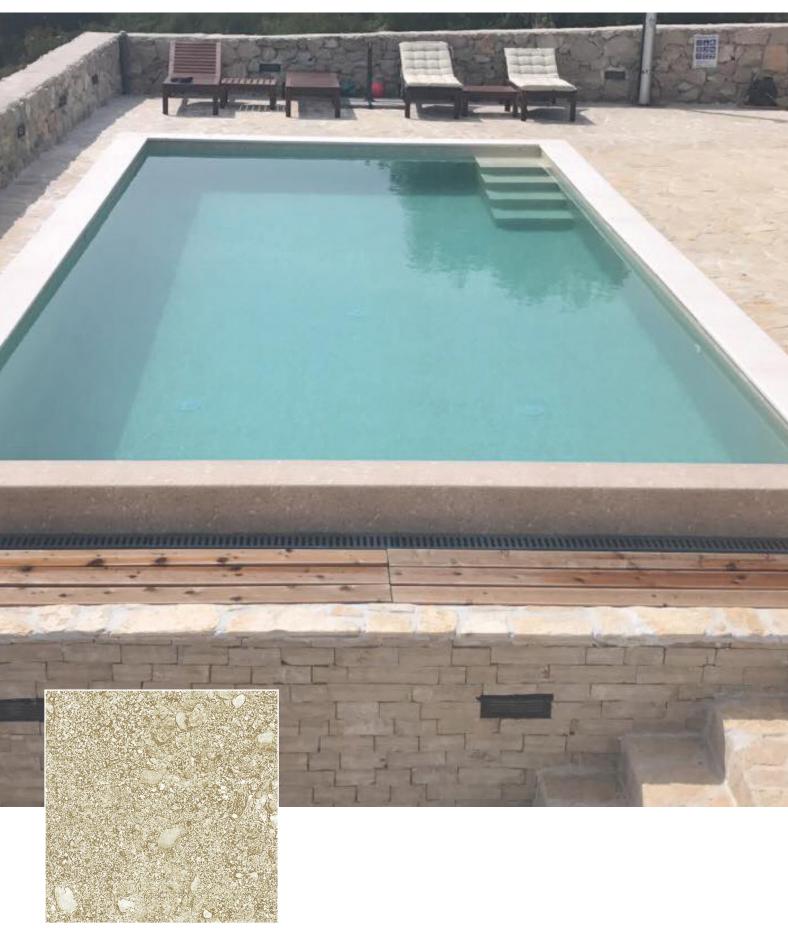


NGD Playa Arena

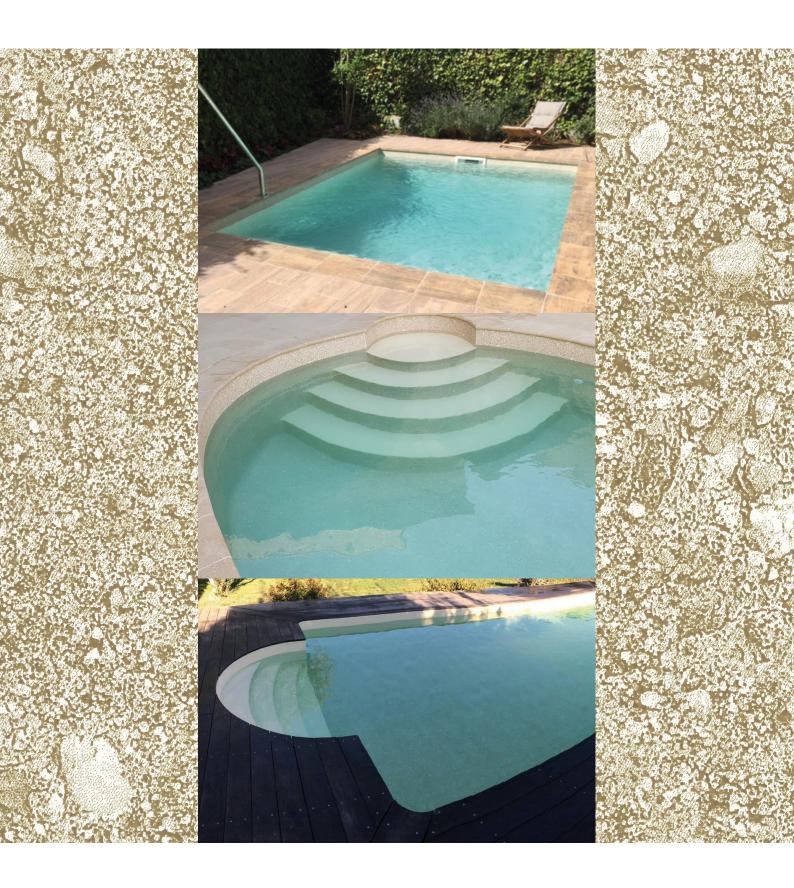

Timelessly beautiful and refreshingly different

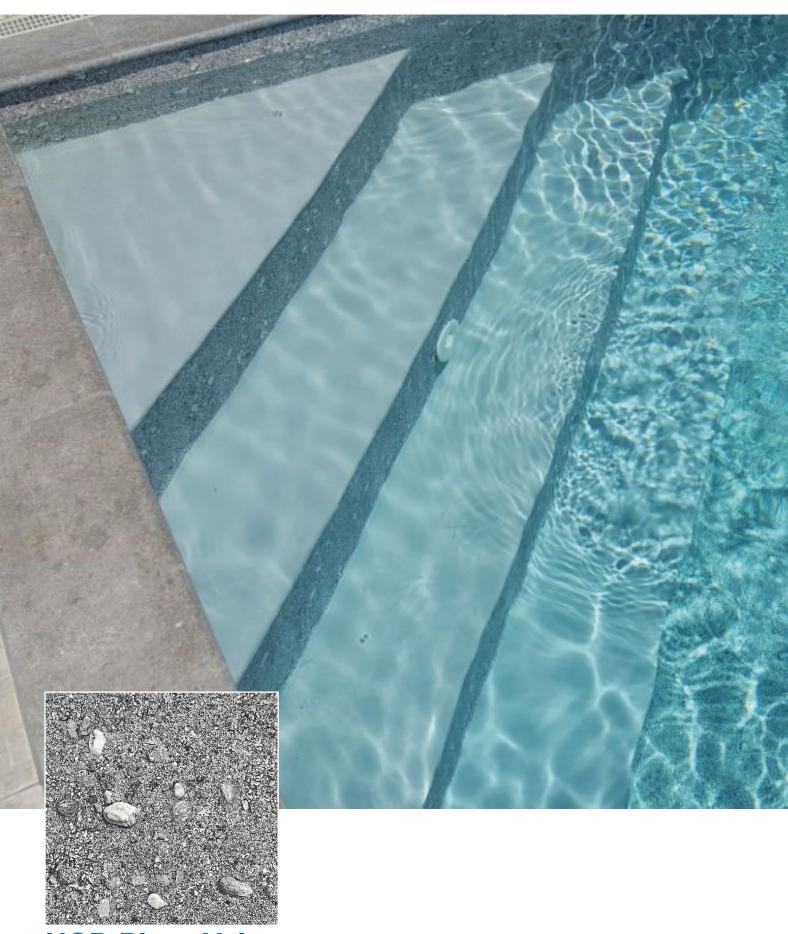

NGD Playa Volcano

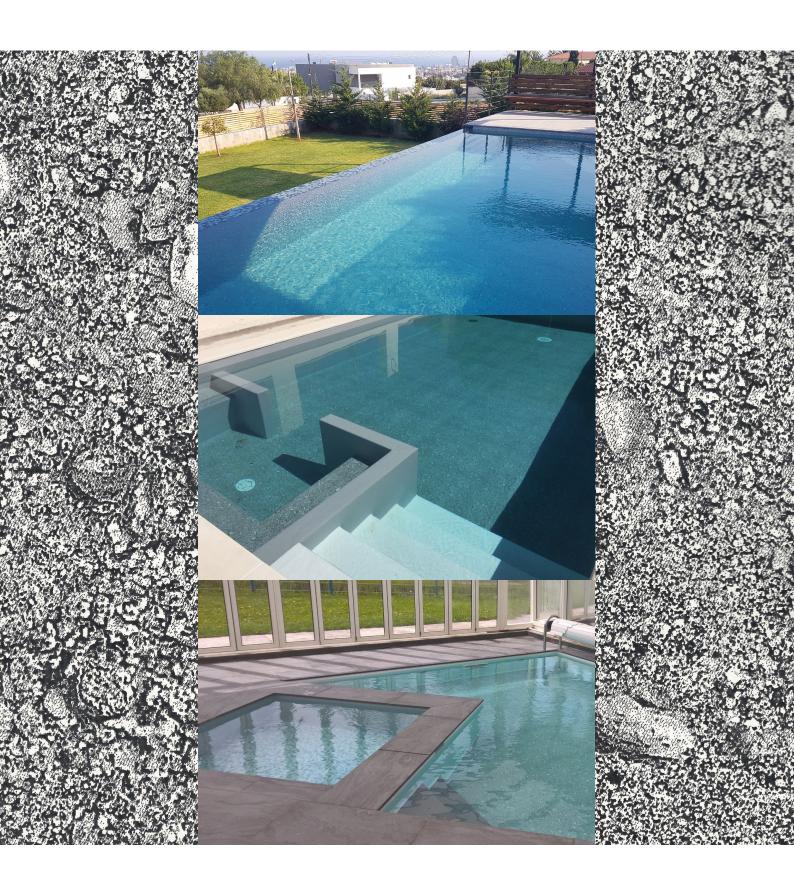

Technical properties

The delifol swimming pool linings have the following technical characteristics:

DLW delifol							
	Norm	Unit	Туре	NG/NGC	NGD	NGP	Tolerance
Thickness	EN 1849-2	mm		1,5	1,5	1,9	+0,2 / -0,15
Integrated fabric				ja	ja	ja	
Weight per area	EN 1849-2	kg / m²		1,75	1,75	2,0	+0,2 / -0,1
Tensile strength	EN 12311-2	N / 5cm	longitudinal/transversal	>2300 / >1900	>2300 / >1900	>2300 / >1900	
Elongation at break	EN 12311-2	%	longitudinal/transversal	>15 / >23	>15 / >23	>20 / >25	
Tear propagation resistance	EN 12310-2	N	longitudinal/transversal	>400 / >500	>400 / >500	>400 / >500	
Separation resistance	EN 12316-2	N / 5cm	longitudinal/transversal	>110 / >100	>110 / >100	>140 / >120	
Dimensional change	EN 1107-2	%	longitudinal/transversal	≤0,35 / ≤0,30	≤0,35 / ≤0,30	≤0,35 / ≤0,30	
Resistance to cold	EN 495-5	°C		- 30	- 20	- 30	
Light-fastness	EN ISO 105-B02	Stufe		7	7	7	
Artificial loading wittern	EN ISO 4892-2 3000h	Stufe		≥3	≥3	≥3	
Fabric							
Fibre density	DIN 61100-2	cm ⁻¹	longitudinal/transversal	8 / 6,5	8 / 6,5	8 / 6,5	
Weight	DIN 61100-2	g / cm²		170	170	170	
Fibre count	DIN 53830-3	dtex		1100	1100	1100	

Accessories

Special swimming pool cleaner

We offer two special cleaning agents for an effective yet gentle cleaning of your DLW delifol swimming pool:

DLW deliclean

is a highly effective basin cleaner. With DLW deliclean dirt, rings of fat and soot can be removed quickly and easily.



DLW delicalc

is an intensive cleaner for outdoor and indoor swimming pools. It removes limestone and sediment deposits and is effective against persistent rust and all sorts of dirt. Even encrusted lime deposits get dissolved. A mineral acid mixture, germ impeding and anticorresive.



Pond Lining

... or are you planning a swimming pond, a natural pool, a creek, a water garden, a pond with plants in? We also have exactly the right products:



For more information please see our ponds brochure.







Linings for swimming pools and ponds:

- fascinating creative
- large variety of designs
- a lot of combination of colours
- reassuringly long-lasting
- cost efficient
- finished in a very short time

Agent for UK / Ireland

On-Site Pool Linings Ltd 22 Laughton Road Thurcroft, Rotherham, South Yorkshire S66 9LP

Tel.: +44 (0)1709 542128 Fax: +44 (0)1709 730370

E-Mail: dave@on-sitepoollinings.com

Agent for USA

Bradford Products LLC 710 Sunnyvale Drive Wilmington, NC 28412 Tel.: +1 (0)910791 2202 Fax: +1 (0)910791 2449

E-Mail: delifol@bradfordproducts.com

Agent for Canada

Greg Solmundson (Owner)
Ark Custom Pool & Spa
West Kelowna, British Columbia
Phone: (250) 215-1210
Calgary, Alberta
Phone: (403) 993-0383
E-Mail: greg@arkcustompool.com
www.arkcustompool.com

Headquarters

DLW Flooring GmbH Stuttgarter Straße 75 D - 74321 Bietigheim-Bissingen Tel.: +49 (0)7142 71-292 Fax: +49 (0)7142 71-660 E-Mail: info@dlwdelifol.com